
TRANSAXLE



Rated power	1.2KW
Motortype	BLDC
Rated torque	3.18N.m
Rated speed	3,600rpm
IP level	IP65
Working method	S2 (60 mins)
Gear reduction ratio	22:1
Max output torque	300Nm
Braking method	Drum brake T>360Nm

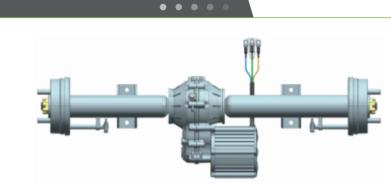

- Excellent variable speed performance: Adjustable speed & torque, easy high & low speed conversion and accurate speed control through gearbox & motor control
- Simple operation: Automatic control adoption and easy operation.
- High reliability: High quality motor and transaxle adoption, high reliability & stability assurance through strict testing and experimental verification.
- Low maintenance cost: Long designed service life, maintenance and replacement cost of the enterprise reduction.